

Light switches from energy-saving mode to full power when motion is detected

## **APPLICATIONS**

- Security & perimeter lighting
- Public toilets & depots
- Sign lighting
- Warehouse & workshop entry






1300 884 724


info@highlux.com.au www.highlux.com.au



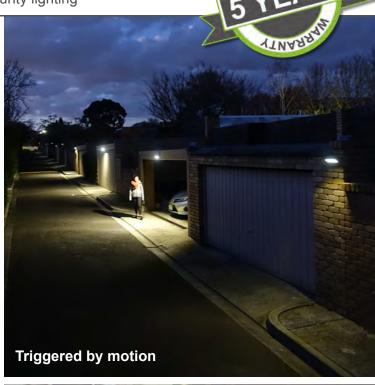

Key Specifications	
MATERIAL	Aluminium alloy housing
SOLAR PANEL	10W (supplied with 3.5mm extension cable)
RUN TIME WITHOUT CHARGE	3 nights (42 hours) in energy saving mode
MOTION SENSOR	Passive infrared (PIR); 3-5m sensing range
LED	10W (1,050lm) when motion sensed 1W (110lm) in energy-saving mode
BATTERY	3.7 Lithium-lon, replaceable
COLOUR	Black (Custom colours available on request)
DIMENSIONS	Solar panel: 0.5kg; 35 x 24 x 24cm Light/luminaire: 2kg; 24 x 12 x 8cm
SHIPPING DIMENSIONS	1x Carton, 13 x 35 x 26cm; 2.8kg
RECOMMENDED MOUNTING HEIGHT	2.5 to 4m
INSTALLATION	Adjustable mounting bracket suitable for Ø8mm fasteners (2x SS304 wall mounting bolts supplied)









1300 884 724